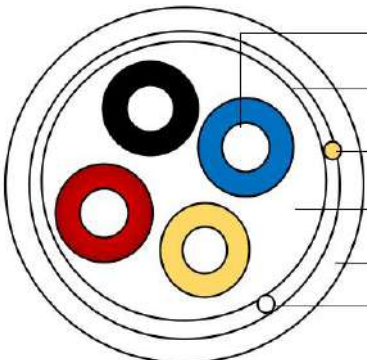



DATASHEET

Specifications

Item	Alarm Cable		Configuration:	
Conductor	Conductor	6core*0.22mm ²	 <ul style="list-style-type: none"> Conductor Al Foil Drain wire Insulation Jacket Ripcord 	
	Material	CopperCladAluminum		
	Structure	7*0.2mm ²		
Insulation	Material	PVC		
	Diameter	1.0±0.15mm		
Shielding	Foil	Al Foil		
	Drain wire	0.4mm CCS		
Outer Jacket	Material	PVC		Certificates: CE, RoHS
	Average Thickness	0.6mm±0.03mm		
	Dimeter	4.0mm±0.2mm		Packing: 100M/roll 6 rolls/carton.
	Color	White		
Printing	SHIELDED SECURITY ALARM CABLE 24AWG (7/0.20) 4 CORE 001M....100M			
Length	100M			
Electrical Characteristics:				
Temperature Rating	-20°C To +70°C			
Operating Voltage	300V RMS Max.			
Dc resistance:	24.8ohms/1M1 Nom			
Capacitance Between conductor to Shield1Khz	60pF/ft Nom.			