




| | | | |
|------|-------------|------|--------|
| REV. | DESCRIPTION | DATE | DESIGN |
|------|-------------|------|--------|

P1

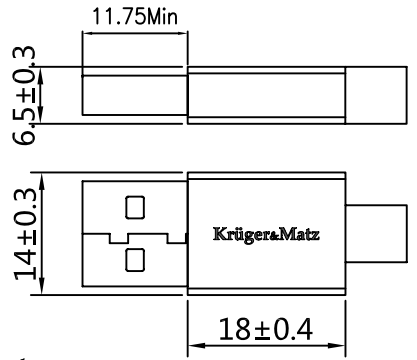


Electrical character:

- 100% open & short testing;
- Withstanding voltage:DC 300V 0.01Sec;
- Insulation resistance:5M Ohm(Min) ;
- Conductive resistance 3 Ohm(Max).
- Support 10Gbps transmission speed

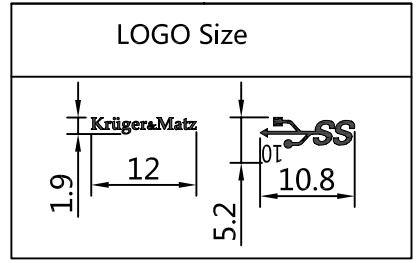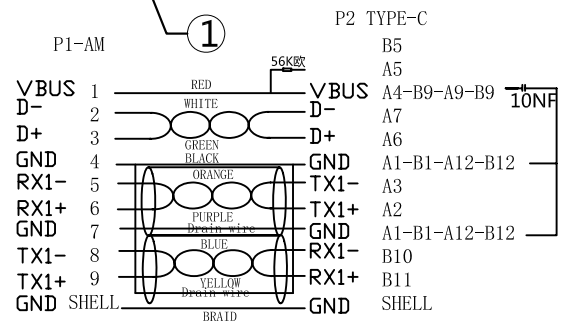

| | | |
|--------|----------|-----------|
| Client | KM1262 | KM1263 |
| Length | 500±20mm | 1000±30mm |

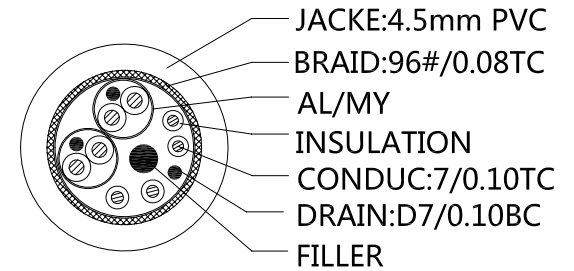

CABLE SPECIFICATION

| | | | | |
|-----|--------------|--|------|------|
| ⑦ | OUTER MOLDED | Black PVC | | |
| ⑥ | INNER MOLDED | LDPE | | |
| ⑤ | SHELL | Type CM AL Shell, Grey, 11.35*6.63*17 | PCS | 1 |
| ④ | SHELL | USB AM AL Shell, Grey, 18*14*6.5mm, | PCS | 1 |
| ③ | CON | Type CM, Nickel Plated | PCS | 1 |
| ② | CON | USB AM, Nickel Plated | PCS | 1 |
| ① | CABLE | [(7/0.10TC+FPE0.7)*1P+7/0.1TC+AL+MY]*1P+(7/0.10TC+HDPE0.52)*1P+(41/0.10TC+PP0.88)*2C+AL+MY+D7/0.10BC+96#/0.08TC+OD:4.5mm Black | PCS | 1 |
| NO. | ITEM | DESCRIPTION | UNIT | Q'TY |

| | | | | | |
|----------|----|------------------------------|------------|----------|---------------------|
| | | Drawing No. JXD-UC1107/NI/BK | | | |
| X.±0.20 | | | | | |
| .X±0.15 | | | | | |
| .XX±0.10 | | REV | A/0 | Title | USB 3.0 AM-Type C M |
| Scale / | | Customer | JXDSZ-036 | Draw | Song |
| Page 1/1 | | Item No. | - | Checked | |
| Unit | mm | Date | 2023/03/30 | Approval | |